

HOW TO

MOBEYE CM41 PRODUCTS

Connect a magnet contactor to an input?


External sensors can be connected to the inputs. Upon closing (or opening) an input, the Mobeye "CM"-product will send out an alarm message. The default setting is NO (Normally Open).

The cable of the magnet contacts has a core made of 4 wires: black, red, blue yellow.


1. Connecting

Connect the magnet contacts to the input connectors (at the same time press the corresponding green pin). When connecting the wire, the + and – of the input does not matter, the colours of the wire do (see 2.).

Input 1 (IN1) and Input 2 (IN2)

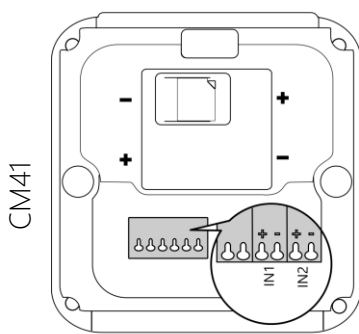

CM41 outdoor

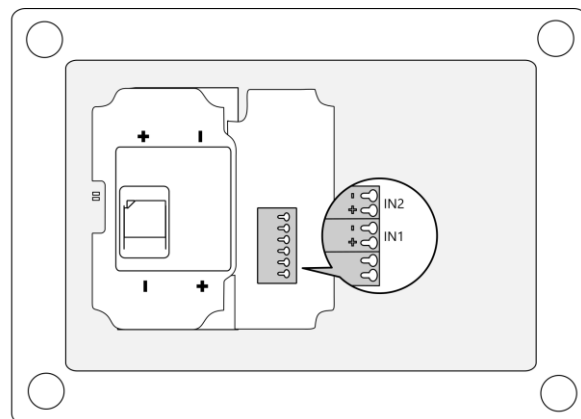

2. Normally Open or Normally Closed

Normally Open

If the magnet contact has a normally open positioning, the input needs to be set to 'NO'. Since this is the factory settings the inputs, so no change needs to be made.

Connect the black and red wires to the input

Normally Closed

If the magnet contact has a normally closed positioning, the input needs to be set to 'NC'.

Via Portal

Go in your 'Dashboard' to the paragraph 'Device Settings'. Choose 'Edit Settings' (pencil, top right corner). Change the setting to 'NC' and 'Save' the new setting.

Via SMS command

text the following command to your device

CODE TYPEIN1:NC (for input 1), CODE TYPEIN2:NC (for input 2) (example: 1111 TYPEIN1:NC)

Connect the black and red wires to the input.