



Series K

K-26

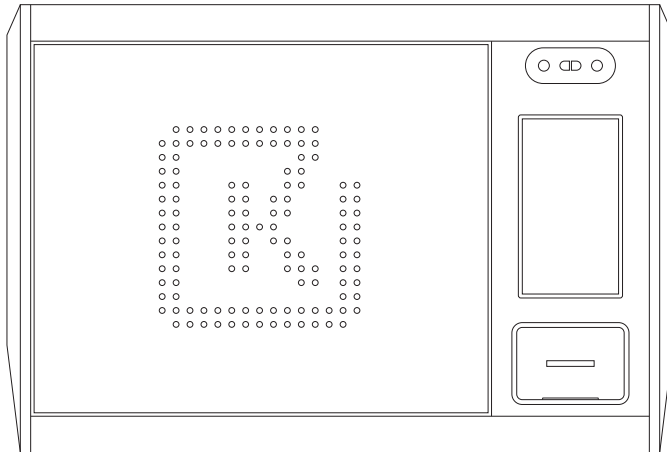


Product Manual
(Stand-alone Version)

Packing Details

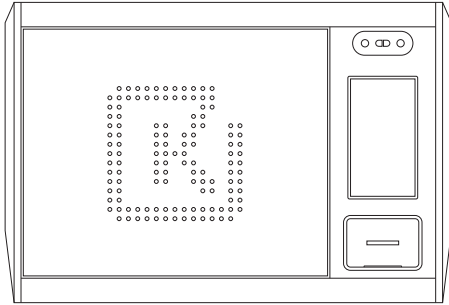


Key Cabinet X 1




Power Cable X 1




KeyTag X 31



Support Frame X 1




KeySeal X 31




Mechanical Key X 2



Expansion Bolt X 9



Product Manual X 1




installation drawing X 1




KeyLabel X 31

Technical Parameters

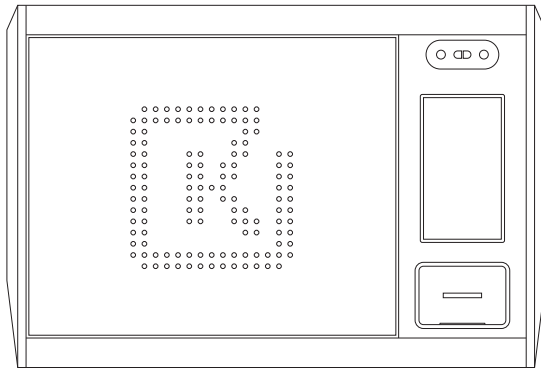

566mm

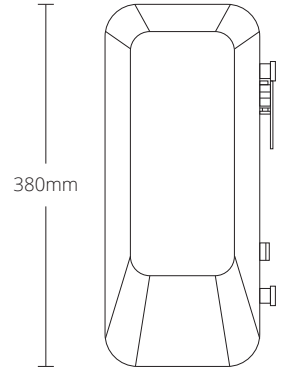

380mm



177mm

Key positions	26
Dimensions (L*W*H)	566mm x 177mm x 380mm
Weight	17 kg net
Material	1.5mm thick steel + ABS
Door	Solid Steel


Power Supply	220V > 12V / 5Ah
Power Consumption	60W Max
Operating System	Android
Display	7" Touchscreen
Certifications	CE

Product Overview

- ❶ KeySlot Set
- ❷ Touchscreen
- ❸ Face Recognition
- ❹ Fingerprint Reader
- ❺ Status Light
- ❻ RFID Card Reader
- ❼ Mechanical Lock
- ❽ USB Port
- ❾ Support Frame
- ❿ Internet Port
- ⓫ Power Outlet

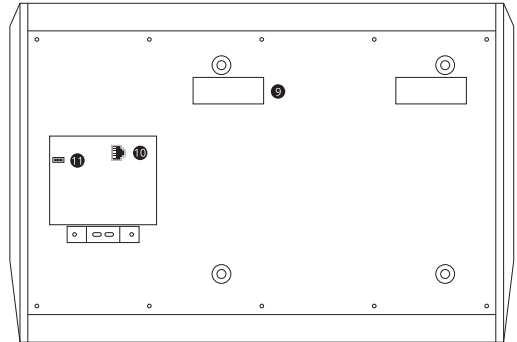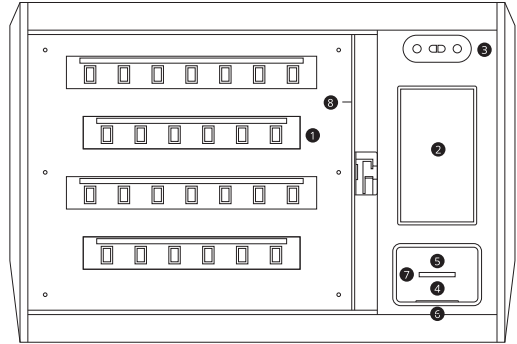



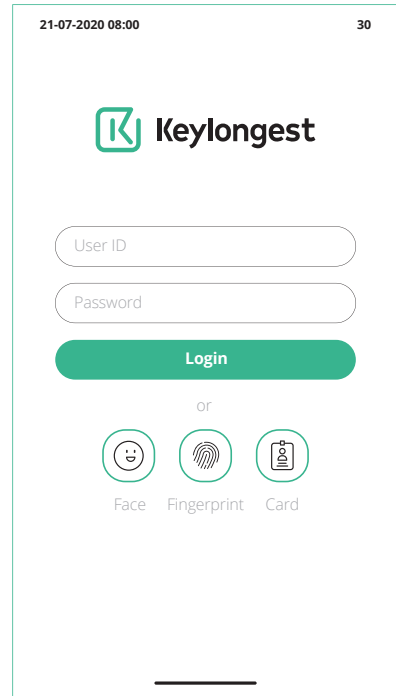








- 1 Click the Touchscreen.
- 2 Input the Administrator ID "00000".
- 3 Input the Administrator Password "00000".
- 4 Click "Login".



Main Interface



























The main interface shows the status of all keys.





 01 Present	 01 Abnormal
 01 Absent	 01 Reserved
 01 Unregistered	 01 Allowed
	 01 Not Allowed

 Home	 Settings	 Report	 Me
--	--	--	--



21-07-2020 08:00 30


Welcome Nadine Franke →

 01	 02	 03	 04
 05	 06	 07	 08
 09	 10	 11	 12
 13	 14	 15	 16
 17	 18	 19	 20
 21	 22	 23	 24
 25	 26		

 Home	 Settings	 Report	 Me
--	--	--	--


Main interface → Settings → Key settings

- 1 Select one key, press and wait for 1 second.
- 2 Click “” to select all keys, then click “” to register.
- 3 Insert all KeyTags.
- 4 Close the door.
- 5 All key icons change green, registration done.

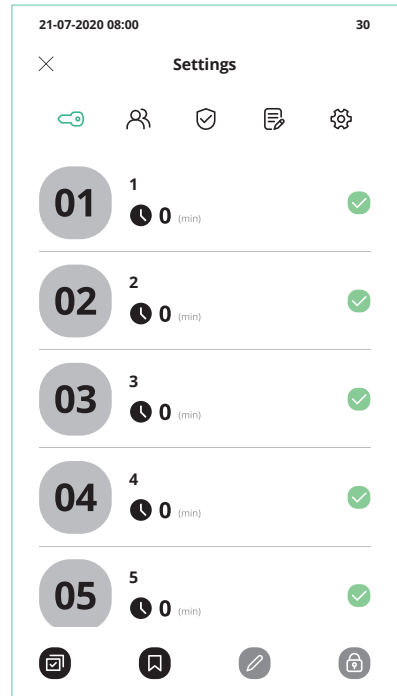


Key Settings

Main interface → Settings → Key settings

- 1 Select one key, then press “”.
- 2 Input “Key Name” and “Permission Validity”, press “OK”.

Permission Validity

Setup the return time of the key. If the key is not returned on time, there will be a alarm prompt.

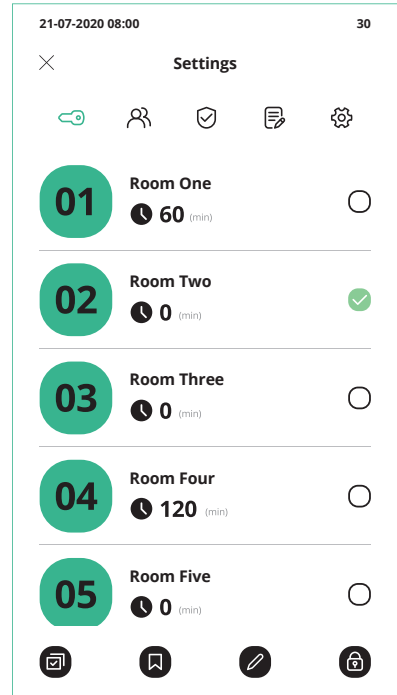

Main interface → Settings → User settings

- 1 Click " + ".
- 2 Input "User name", "User ID", "Telephone", and "Email".
- 3 Setup the login type "Fingerprint", "Face ID", "Card", and "Password".
- 4 Select the user type.
- 5 Select the valid time.

21-07-2020 08:00 30

✕ **Edit User** ✓

*** User name**

Please input name

*** User ID**

User ID length is 4-11 digits

Tel

Please input the tel number

Email

Please enter email address

Fingerprint >


Face ID >

Card >


*** Password**

User Settings



Change user information

- 1 Select one user, press and wait for 1 second.
- 2 Press “

Change user status

Click “

Delete User

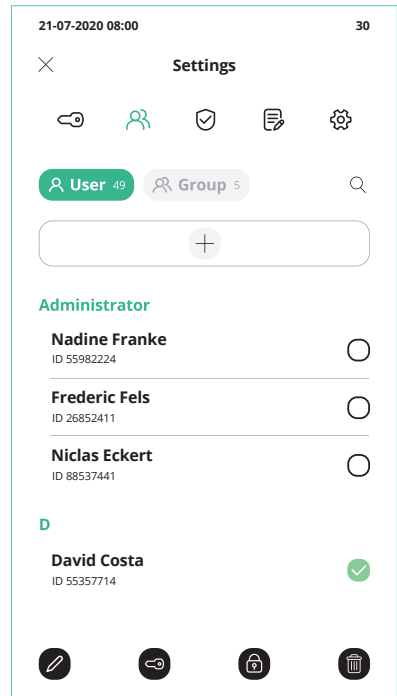- 1 In the User settings interface, select one user.
- 2 Press “

The screenshot displays the 'Settings' screen for user management. At the top, the date and time are '21-07-2020 08:00' and the battery level is '30'. Below the title 'Settings', there are five icons: a key, a person, a shield, a document, and a gear. A search bar contains 'User 49' and 'Group 5'. Below the search bar is a large empty input field with a plus sign. The user list is divided into sections: 'Administrator' and 'D'. Under 'Administrator', there are three users: Nadine Franke (ID 55982224), Frederic Fels (ID 26852411), and Niclas Eckert (ID 88537441). Each user has a radio button to its right. Under 'D', there is one user: David Costa (ID 55357714), who has a checkmark icon to his right. At the bottom, there are four icons: a pencil, a key, a lock, and a trash can.

Add Group

- 1 Click "Group", then click " + ".
- 2 Input "Group name".
- 3 Select "Operation permission".
- 4 Select "Valid time".
- 5 Select "Key permission".

User Permission

Administrator have all Permission and common user do not have Permission by default. Customize user permissions by grouping.

21-07-2020 08:00 30

✕ **Edit Group** ✓

Group name

Trade 5/50

Operation permission >

Valid time >

Key permission >

Valid Time Settings

- 1 Select one user, then press "✎".
- 2 Select the type "User".
- 3 Select valid time "Custom".
- 4 Select "Week" or "Date", then press "+".
- 5 Add time and date.

Valid time

All day

Custom

Week Date

Monday 08:00-12:00

21-07-2020 08:00 30

✕ **Add valid time** ✓

Start time End time

22 00 22 58
23 : 01 23 : 59
00 02 00 00

08:00-12:00

14:00-18:00

Add time

Sunday

Monday


Tuesday


Wednesday

Thursday


Add Fingerprint, Face ID, and Card

Add Fingerprint

- 1 Select one user, then press " ".
- 2 Click "Fingerprint".
- 3 Register fingerprints.




Add Face

- 1 Select one user, then press " ".
- 2 Click "Face".
- 3 Stand in front of camera.




Add User Card


- 1 Select one user, then press " ".
- 2 Click "User Card".
- 3 Present user card on the card reader.



Key Permission


Main interface → Settings → User settings


- 1 Select one user, than press “”.
- 2 Select keys.

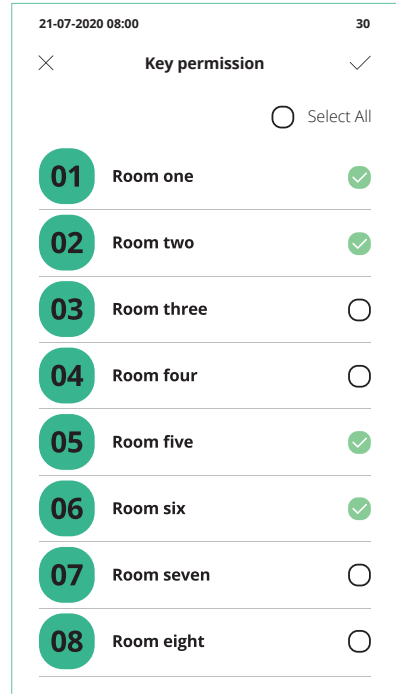

Add Multi-verification

Main interface → Settings → Multi-verification settings

- 1 Press “ + ”.
- 2 Select "Key", "User" and "Verifier".
- 3 Click “  ” to activate the verification.

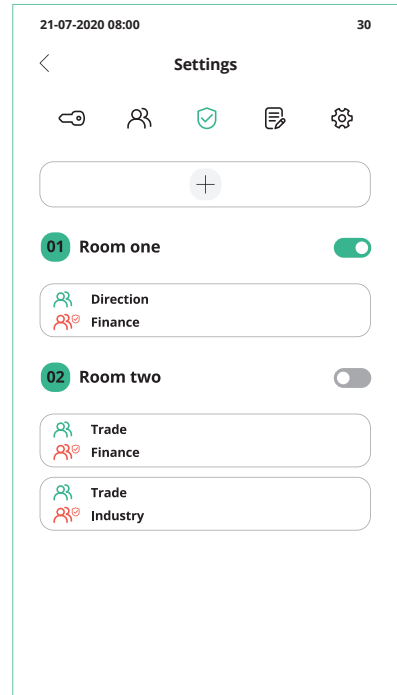


Event Settings

Add Event

Main interface → Settings → Event settings


- 1 Press “ + ”.
- 2 Input "Event", then press “OK”.
- 3 Click “ ⚙ ”.
- 4 Select keys that needs to activate the event.

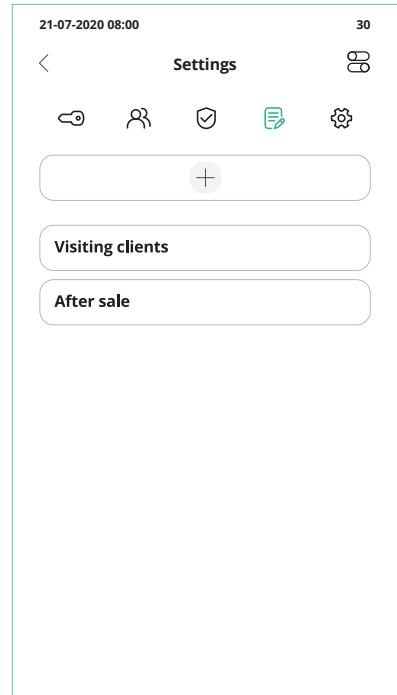


By Password

- 1 Input "user ID" and "user password".
- 2 Click "Login", select a key, take the key.

By Face


- 1 Press " ".
- 2 Stand in front of camera.
- 3 Select a key, take the key.

By Fingerprint

- 1 Input "user ID", then press " ".
- 2 Present user finger on the fingerprint reader.
- 3 Select a key, take the key.

By User Card

- 1 Place the user card on the card reader.
- 2 Select a key, take the key.

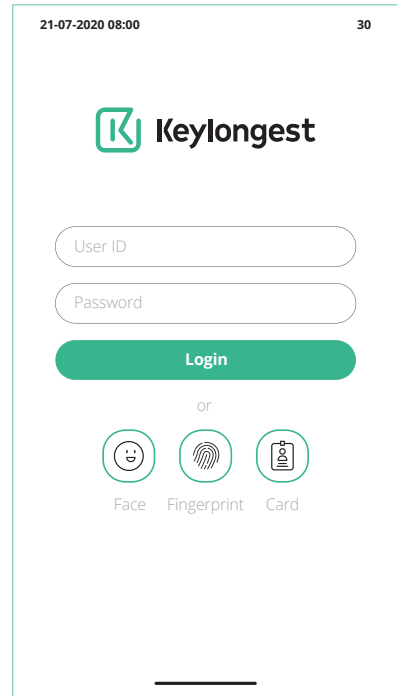


Return Keys

- 1 Present the KeyTag on the card reader.
- 2 Insert the KeyTag to KeySlot with blue light.
- 3 Close the door.

01 Present

01 Absent

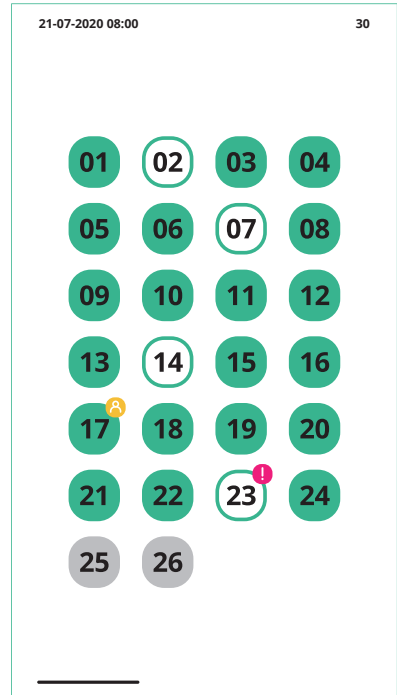

Open the door Illegally

When open the door by incorrect ways, the system will alarm and all KeySlots will flash red.

Door open overdue


If the door is not closed within the set time (Can be changed in Cabinet Settings), the system will alarm.

Foreign object in the KeySlot

If there is a foreign object in the KeySlot, the system will alarm and remind to take out.


Key Returned to incorrect KeySlot

If the key is returned to incorrect KeySlot, the door can not be closed. And the system will alarm and this KeySlot will flash red.

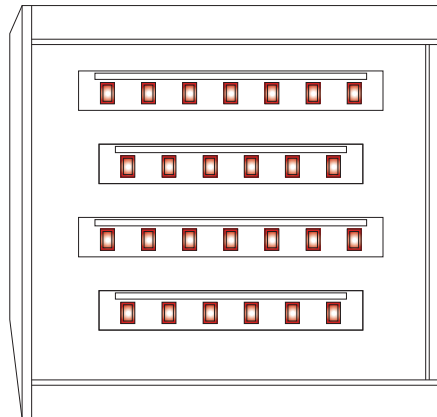

Emergency To Take Keys

- 1 Use the mechnial key to take keys.
- 2 Cut the security seals for the keys you require.
- 3 Remove the Keys from the security seal.

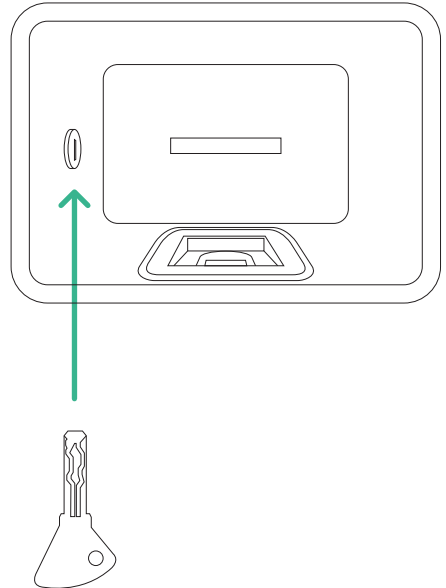

Main interface → Report

Click “General”, “Abnormal”, and “Log” to view report.

Click “” to filter.

21-07-2020 08:00 30

< Event log >

General Abnormal Log

User Key

Abnormal Absent

Start time End time

01-07-2020 11:57 01-07-2020 11:57

2 - Room Two

Take Malte Fischer

Date	Take key	Open door	Close door
01-07-2020	11:57:26	11:57:26	11:57:26

Return Malte Fischer

Date	Take key	Open door	Close door
01-07-2020	11:57:26	11:57:26	11:57:26

1 / 3


Export Report

By USB

- 1 Click "📄", select "pages".
- 2 Click "Export to external storage device".
- 3 Click "Open door".
- 4 Insert USB external storage device.

By Email

- 1 Click "📄", select "pages".
- 2 Click "Send email".

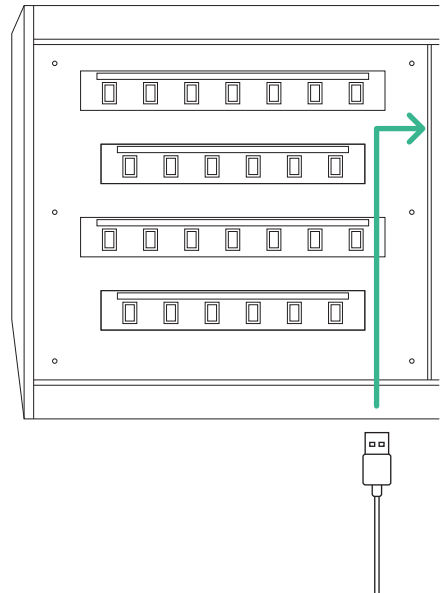

Special Announcement

Please refer to the actual product, the instructions are for reference only.

The manual and program will be updated in real time according to the product, and there will be no notice if it's updated.

If you do not follow the instructions in the manual, the user shall bear any losses caused thereby.

The final interpretation of this manual belongs to Landwell Europe GmbH

© Copyright Landwell 2023

LANDWELL